

Trussing Stages

TS7

Large Pyramid




- Width 7m Height 6m Depth 6m
- Starting from £3500 per day at normal rate
- Weekend rate £5250
- Decking Width 6m Height 1m Depth 6m
- See our website for more information

www.plrs.co.uk

Trussing Stage

TS7

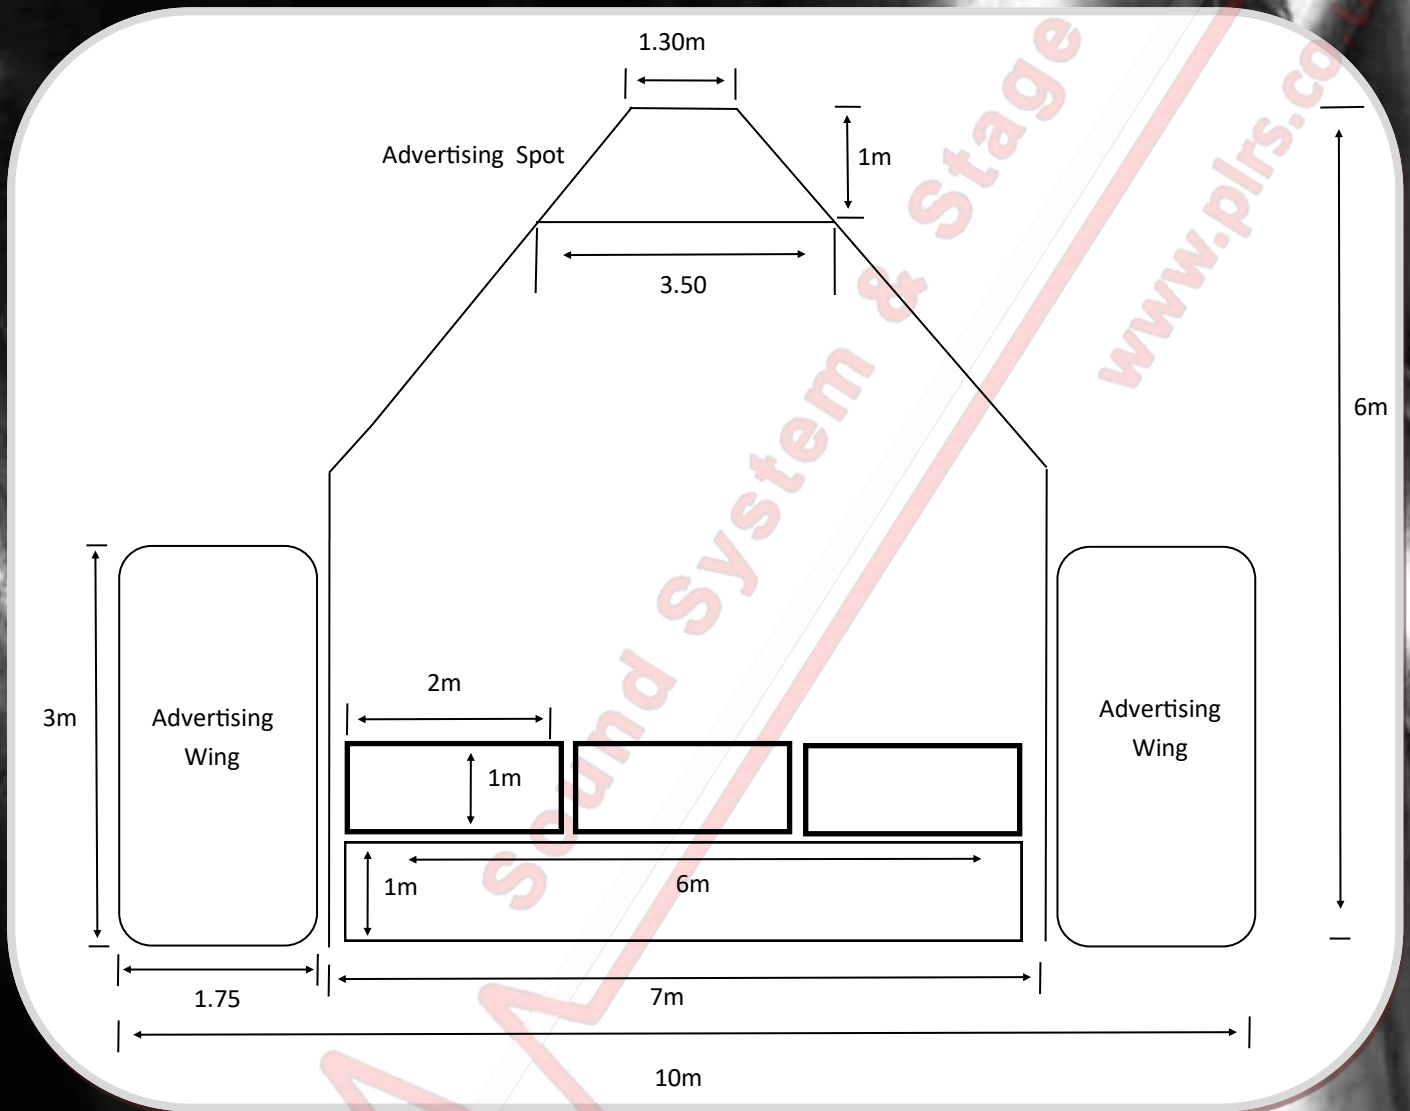

TS7 Stage


Width	Depth	Height
7m	6m	6m
Decking		
6m	6m	1m
Advertising Wings (Banner not included)		
1.75m	0m	3m
Set Up / Breakdown (*When hired as part of package)		
Estimated Time	Free Days Prior*	Free Days After*
5 Hours	1	1

Trussing Stage

TS7

TS7 Stage Branding Options


Type	Height	Width	Fixing
Wing (x2)	3m	1.75m	Eyelets
Handrails	2m (each)	6m	Eyelets
Skirt	1m	6m	Top: Velcro (Loops) Bottom: Eyelets
Top Section	1m	Varied	Eyelets

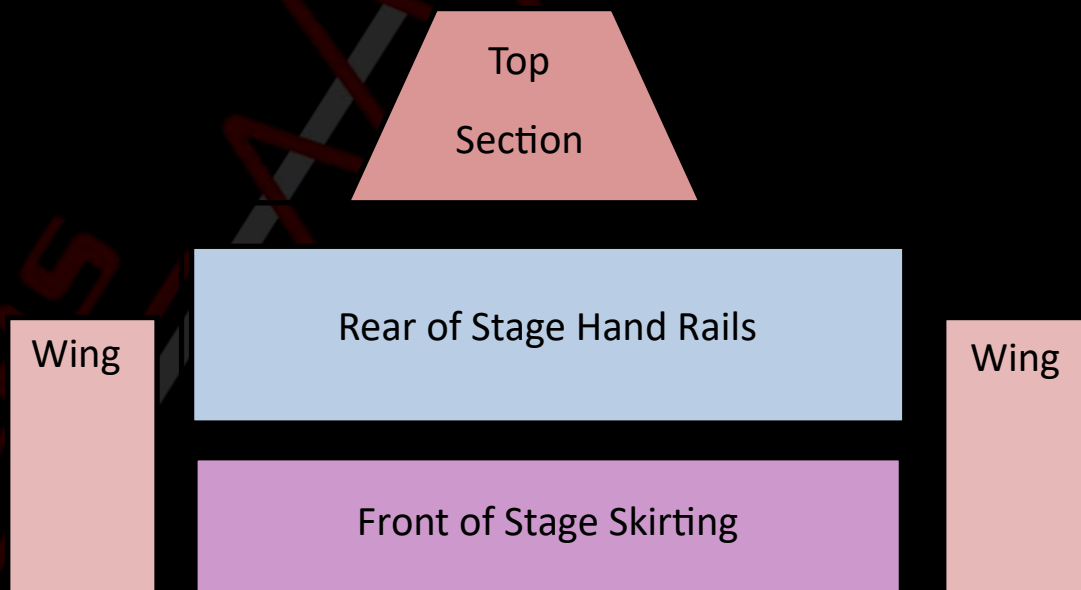

Trussing Stage

TS7

Overhead View

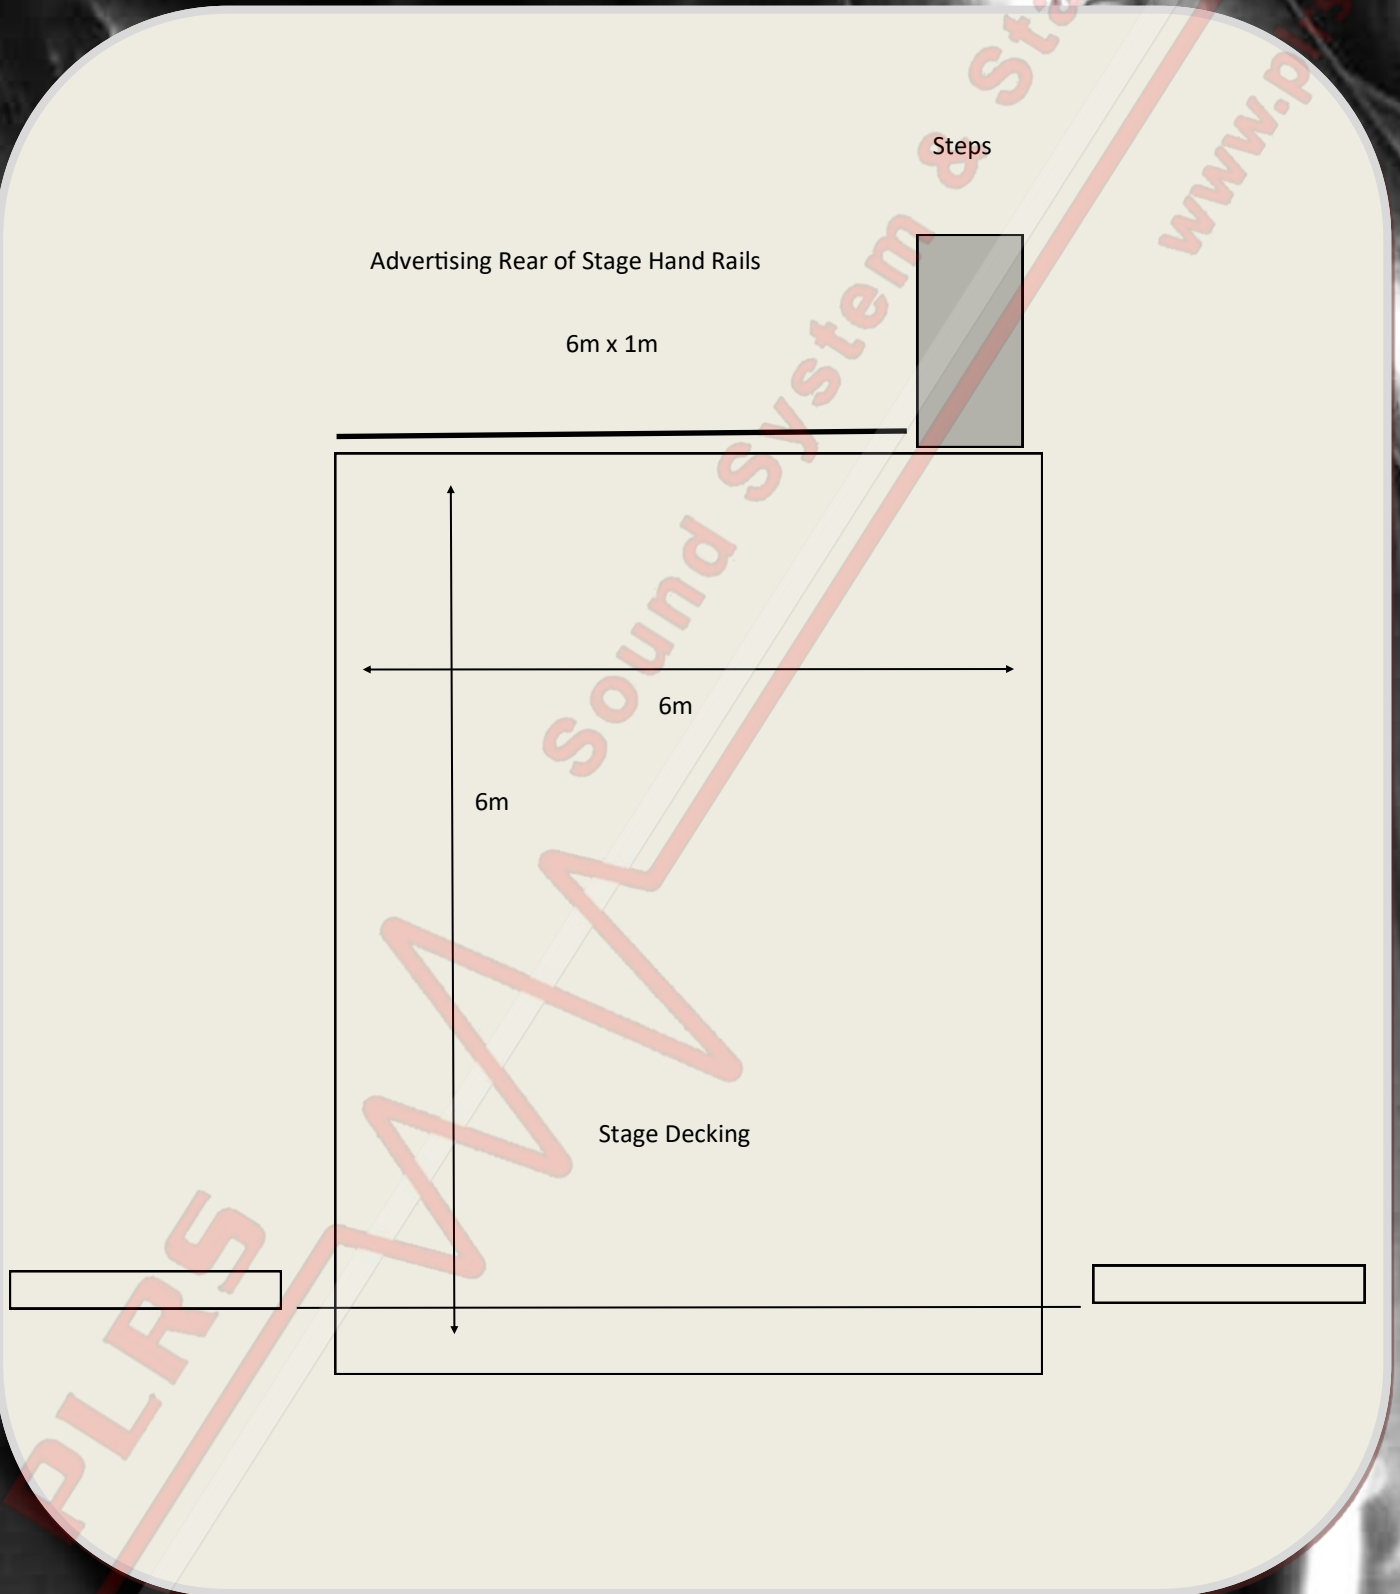






Trussing Stage

TS7

Max UDL	Max PNT N/A
250kg	155KG
222kg	111kg
50kg	24kg
916kg	316Kg
259kg	157kg

			Pyramid	
			4 stakes	8 stakes
Stage Type				
Surface Area (m2)			72	72
Mass / Downforce (kg)			1354	2354
Wind Speed	BF	mph	m/s	
	3	8	3.6	
	3	10	4.5	
	3	12	5.4	
	4	14	6.3	
	4	16	7.2	
	5	18	8.0	
	5	20	8.9	
	5	22	9.8	
	5	24	10.7	
	6	26	11.6	
	6	28	12.5	
	6	30	13.4	
	7	32	14.3	
	7	34	15.2	
	7	36	16.1	
	7	38	17.0	
	8	40	17.9	
	8	42	18.8	
	8	44	19.7	
	8	46	20.6	
	9	48	21.5	
	9	50	22.4	
	9	52	23.2	
	9	54	24.1	
	10	56	25.0	
	10	58	25.9	
	10	60	26.8	

Monitoring Interval	Action Level	Action
8 hourly		Regular Weather Forecast Review.
Hourly		Regular on Site Assessment
30 mins		Prepare to halt erection operations until safe working conditions have resumed. During Phase D (Show) it is likely that Show Stop will occur in this range due to factors other than TDS safety
15 mins		Site safety meeting and risk assessment. Prepare for full site evacuation
Constant		Site evacuation procedure to be implemented