

Trussing Stages

TS2

Mini Pyramid




- Trussing Width 7m Height 4m Depth 6m
- Decking Width 6m Height 0.6m Depth 6m
- Starting from £1600 per day at normal rate
- Weekend rate £2400
- See our website for more information

www.plrs.co.uk

Trussing Stage

TS2

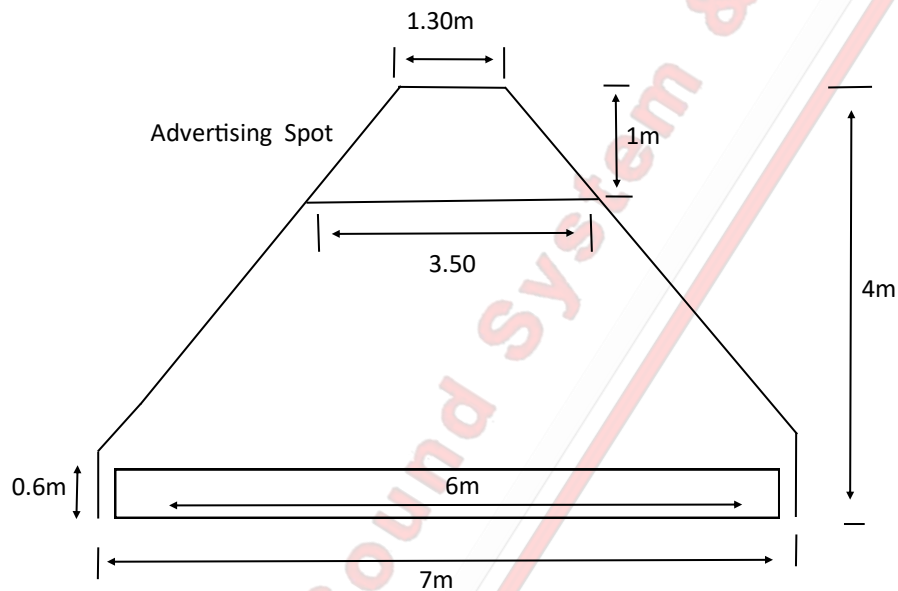

TS2 Stage

Width	Depth	Height
7m	6m	4m
Decking		
6m	6m	0.6m
Set Up / Breakdown (*When hired as part of package)		
Estimated Time	Free Days Prior*	Free Days After*
3 Hours	0	0

Trussing Stage

TS2

TS2 Stage Branding Options

Type	Height	Width	Fixing
Skirt	0.6m	6m	Top: Velcro (Loops) Bottom: Eyelets
Top Section	1m	Varied	Eyelets


Top
Section

Front of Stage Skirting

Trussing Stage

TS2

Overhead View

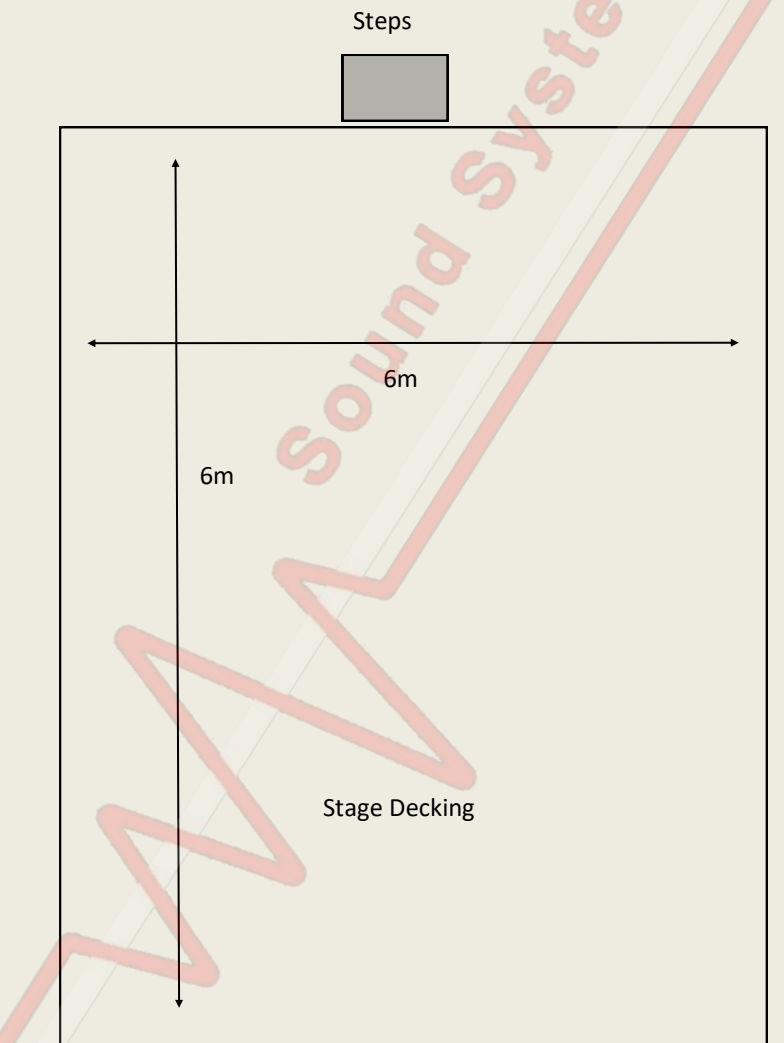






Trussing Stage

TS2

Max UDL	Max PNT N/A
250kg	155KG
222kg	111kg
50kg	24kg
916kg	316Kg
259kg	157kg

			Pyramid	
			4 stakes	6 stakes
			Surface Area (m2)	72
			Mass / Downforce	1354
Wind Speed	BF	mph	m/s	
	3	8	3.6	
	3	10	4.5	
	3	12	5.4	
	4	14	6.3	
	4	16	7.2	
	5	18	8.0	
	5	20	8.9	
	5	22	9.8	
	5	24	10.7	
	6	26	11.6	
	6	28	12.5	
	6	30	13.4	
	7	32	14.3	
	7	34	15.2	
	7	36	16.1	
	7	38	17.0	
	8	40	17.9	
	8	42	18.8	
	8	44	19.7	
	8	46	20.6	
	9	48	21.5	
	9	50	22.4	
	9	52	23.2	
	9	54	24.1	
	10	56	25.0	
	10	58	25.9	
	10	60	26.8	

Monitoring Interval	Action Level	Action
8 hourly		Regular Weather Forecast Review.
Hourly		Regular on Site Assessment
30 mins		Prepare to halt erection operations until safe working conditions have resumed. During Phase D (Show) it is likely that Show Stop will occur in this range due to factors other than TDS safety
15 mins		Site safety meeting and risk assessment. Prepare for full site evacuation
Constant		Site evacuation procedure to be implemented